



WOOD'S POWR-GRIP® AIR-POWERED MANUAL ROTATORS 500 & 700

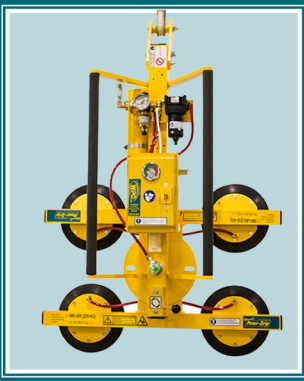


MR49AIR
500 lbs [225 kg]

MR411LAIR
700 lbs [320 kg]



With continuous 360° rotation, these Powr-Grip® vacuum lifters supply an efficient and economical way to feed vertically oriented processing machinery.

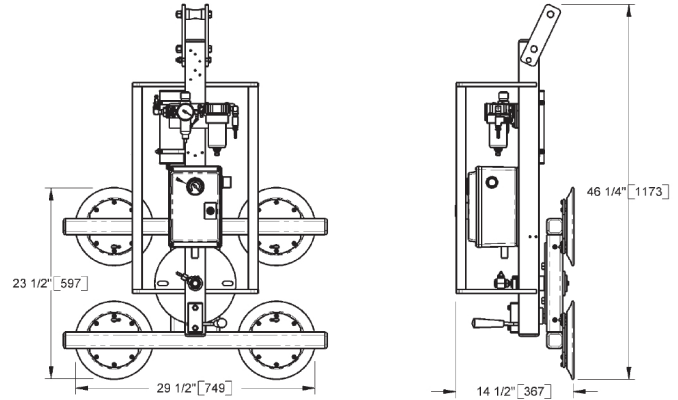

**THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT**

800.548.7341
WPG.com

908 West Main - P.O. Box 368
Laurel, Montana 59044 U.S.A.
406.628.8231 (phone)
406.628.8354 (fax)

Wood's Powr-Grip products are sold through authorized dealers.

	MR49AIR	MR411LAIR
Maximum Load Capacity	500 lbs [225 kg]	700 lbs [320 kg]
Standard Operating Power	Compressed Air, 10 SCFM [283 liters/minute] @ 80 psi [552 kPa]	
Load Movement	Manual rotation, 360° edgewise with locking at each quarter point	
Standard Features	Adjustable-position lift spool Vacuum gauge Vacuum reserve tank Vacuum line filter Spring-mounted pads Blow-off for quick release	
Available Options	Individual pad shutoffs (93011) Pad shutoffs kit with individual gauges (special order) Vacuum loss warning buzzer (93780AM) Linear pad frame (57952) Adjustable vertical handles (special order) 10" [25 cm] diameter, lipped vacuum pads (HV11) (Specifications not as listed above. Please contact us for more information.) Alternative pad compounds, including ones for low-marking, temperature resistant and coated surface applications (special order) Alternative pad frame dimensions and configurations (special order)	
Lifter Weight	80 lbs [32 kg]	
Attach	2 seconds (approximately)	3 seconds (approximately)
Release	1 second (approximately)	2 seconds (approximately)
Standard Pad Spread	23½" x 29½" [597 x 749 mm]	26" x 32" [661 x 813 mm]
Number / Size of Pads	4 / 9" [23 cm] diameter	4 / 11" [28 cm] dia. lipped
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)	

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.