




PR49ACS PR4HV11ACS

500 lbs [225 kg]



מכניק א.ג.ר. בע"מ
MECHANIK A.G.R. LTD
مكنيك أ.ج.ر.



**THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT**



**800.548.7341
WPG.com**

908 West Main - P.O. Box 368
Laurel, Montana 59044 U.S.A.
406.628.8231 (phone)
406.628.8354 (fax)

Wood's Powr-Grip products are sold
through authorized dealers.

WOOD'S POWR-GRIP® POWER ROTATORS 500

These Powr-Grip®
vacuum lifters combine
powered 360° rotation,
adjustable rotation speed
and fast attach/release
times, making them
ideal for high-output
production lines.

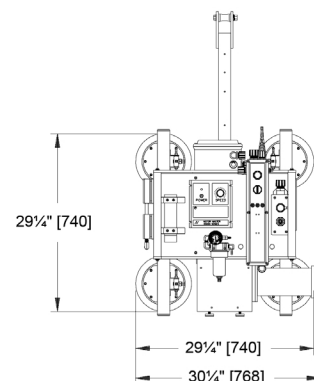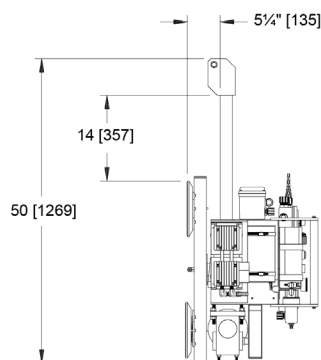

	PR49ACS	PR4HV11ACS
Maximum Load Capacity	500 lbs [225 kg]	
Standard Operating Power	120 volts AC, 60 hertz, 15 amps	
Load Movement	Power rotation, 360° edgewise, with adjustable speed control	
Standard Features	Green lift light Vacuum gauge Vacuum reserve tank Vacuum line filter Spring-mounted pads Twist-lock electrical plug Blow-off for quick release	
Available Options	Voltage adaptation (93032 & 93032AM) Movable control pendant Vacuum loss warning buzzer (93780AM) 12-Volt/DC vacuum back-up system Interchangeable pad frames Individual pad shutoffs (93011) C-Frame lift bar Adjustable vertical handles (special order)	
Lifter Weight	214 lbs [98 kg]	
Maximum Rotation Speed	Full turn, 7 seconds (approximately)	
Minimum Rotation Speed	Full turn, 30 seconds (approximately)	
Attach	2 seconds (approximately)	4 seconds (approximately)
Release	1 second (approximately)	3 seconds (approximately)
Standard Pad Spread	29 1/4" x 29 1/4" [740 x 740 mm]	31" x 31" [788 x 788 mm]
Number / Size of Pads	4 / 9" [23 cm] diameter	4 / 10" [25 cm] dia. lipped
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)	

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.